


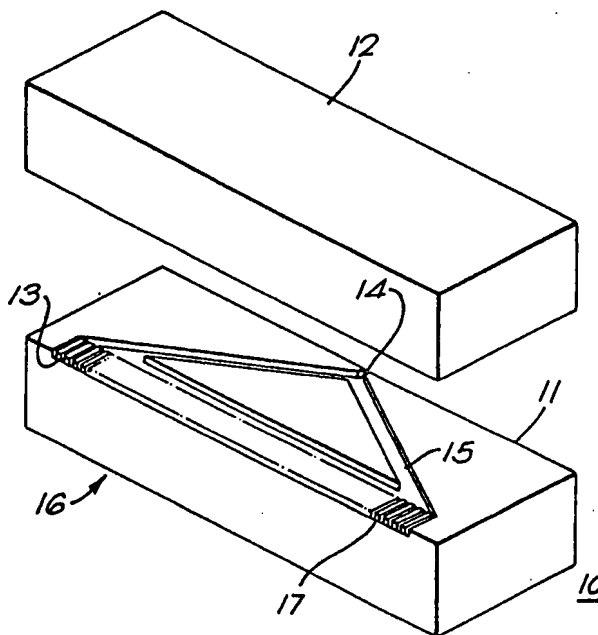

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B05B 1/00, 1/26, 1/14 B05B 7/04, 1/34	A1	(11) International Publication Number: WO 94/07607 (43) International Publication Date: 14 April 1994 (14.04.94)
(21) International Application Number: PCT/GB93/02020 (22) International Filing Date: 28 September 1993 (28.09.93) (30) Priority data: 9220505.3 29 September 1992 (29.09.92) GB P 42 36 037.4 24 October 1992 (24.10.92) DE 9314804.7 19 July 1993 (19.07.93) GB (71) Applicants (for all designated States except US): BOEHRINGER INGELHEIM INTERNATIONAL GMBH [DE/DE]; D-55216 Ingelheim (DE). DMW (TECHNOLOGY) LTD. [GB/GB]; 4 Wilford Bridge Spur, Melton, Woodbridge, Suffolk IP12 1RJ (GB). (72) Inventors; and (75) Inventors/Applicants (for US only) : BARTELS, Frank [DE/DE]; Mannheimer Strasse 5, D-76337 Waldbronn (DE). BACHTLER, Wulf [DE/DE]; Dahlienweg 14, D-55126 Mainz (DE). DUNNE, Stephen, Terence [GB/GB]; Shotley Hall, Church Walk, Shotley, Ipswich, Suffolk (GB). EICHER, Joachim [DE/DE]; Kaiserallee 117, D-76185 Karlsruhe (DE). FREUND, Bernhard [DE/DE]; Karl-Domdey-Strasse 28, D-55435 Gau-Algesheim (DE). HART, William, Barrie [GB/GB]; St. Andrew Hall, Humber Doucy Lane, Ipswich, Suffolk IP4 3PB (GB). LESSMOELLMANN, Christoph [DE/DE]; Hirschstrasse 126, D-76137 Karlsruhe (DE).		(74) Agent: HARRIS, Ian, Richard; D. Young & Co., 21 New Fetter Lane, London EC4A 1DA (GB). (81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, LV, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: ATOMISING NOZZLE AND FILTER AND SPRAY GENERATING DEVICE**(57) Abstract**

The present invention provides a simple form of nozzle assembly for use in generating sprays from a fluid, which comprises a first member (11) having one or more nozzle outlets (14), one or more fluid inlets (16) and one or more channels (15) connecting them formed by electrical or chemical etching or other processes which selectively remove material from one face of the said member (11); and a second member (12) cooperating with the said first member to provide a wall of said outlets, inlets or channels to form the fluid flow paths for the nozzle assembly.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NE	Niger
BE	Belgium	GN	Guinea	NL	Netherlands
BF	Burkina Faso	GR	Greece	NO	Norway
BG	Bulgaria	HU	Hungary	NZ	New Zealand
BJ	Benin	IE	Ireland	PL	Poland
BR	Brazil	IT	Italy	PT	Portugal
BY	Belarus	JP	Japan	RO	Romania
CA	Canada	KP	Democratic People's Republic of Korea	RU	Russian Federation
CF	Central African Republic	KR	Republic of Korea	SD	Sudan
CG	Congo	KZ	Kazakhstan	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovak Republic
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TG	Togo
CZ	Czech Republic	MG	Madagascar	UA	Ukraine
DE	Germany	ML	Mali	US	United States of America
DK	Denmark	MN	Mongolia	UZ	Uzbekistan
ES	Spain			VN	Viet Nam
FI	Finland				

ATOMISING NOZZLE AND FILTER AND SPRAY GENERATING DEVICEBACKGROUND TO THE INVENTIONField of the Invention

The present invention relates to an atomising nozzle and to
5 such a nozzle with a filter, notably to one which produces a spray
of fine droplets suitable, for example, for the administration of a
medicament by inhalation, to the production of such nozzles, and to
a spray generating device incorporating such nozzles.

Description of the Prior Art

10 It is known (e.g. from WO 91/14468) that fluids can be
caused to form very fine droplets on being forced through narrow
nozzles at high pressure. WO 91/14468 proposes to manufacture the
necessary nozzles using methods such as those known in the
manufacture of spinning nozzles. These nozzles are produced, for
15 example, by boring through a thin metal plate with a tungsten-
carbide needle. An important area of application for the equipment
according to WO 91/14468 is the production of aerosols for
inhalation therapy. Demanding requirements are imposed among other
things, on the fineness of the droplets; it has been found during
20 numerous investigations that a considerable number of droplets must
have a size less than 6 μm in order that a sufficient quantity of
the medicine can reach deep enough into the lungs. For safe
treatment the individual pieces of equipment must each produce the
same droplet spectra, since only then is it certain that the given
25 dose of the medicine will be delivered to the lungs in the desired
way.

With the mechanical production of nozzles there are
sometimes disturbing deviations from nozzle to nozzle, possibly due
to the walls of the nozzles being of varying degrees of roughness.
30 It is, amongst other things, difficult to produce double nozzles,
like those shown in Figure 8 of the afore-mentioned WO 91/14468,
with the necessary accuracy. In addition, it is not an easy matter
to obtain nozzles of changing cross-section using known methods,
possibly with a view to accelerating or slowing down the flow of
35 fluid in the nozzle, or to provide impact elements or vortex-
generating devices.

In PCT Application No GB91/00433, there have been described

methods and devices for forming sprays of fine droplets from a fluid without the use of pressurised propellant gasses, notably for the formation of sprays of a fluid medicament which have a mean droplet size of less than 10 micrometres for inhalation by a user so that
5 the droplets of medicament can penetrate into the lower lung. In PCT Application No GB91/02145, there have been described methods and devices by which the formation of such sprays can be optimised by inducing secondary flows in the stream of fluid when it passes through the nozzle aperture.

10 In the preferred form of such methods and devices, a metered dose of the fluid medicament is drawn from a reservoir into a pressure chamber by retracting a piston in a cylinder of a pump mechanism against the action of a drive spring. The piston or
15 spring is latched or otherwise retained in the retracted, or cocked, position so that the metered dose is held at ambient pressure in the pressure chamber of the pump until it is discharged. When discharge is required, the piston or spring is released and the spring drives the piston forward, thus applying a rapid pressure rise to the fluid causing it to discharge through the nozzle aperture and form a spray
20 of droplets.

The very fine droplets required for the application of a medicament to the lower lung are achieved by the use of fine aperture size nozzles and high pressures, typically with nozzle apertures of less than 20 micrometres and pressures in excess of 300
25 bar.

The nozzle apertures required to achieve such fine droplets can be formed in a number of ways, for example by punching a hole in a metal plate and part closing up the hole to achieve a fine aperture with a rough rim which causes the secondary flows in the
30 fluid stream as it passes through the nozzle aperture. However, the techniques used to form the nozzle aperture either require accurate machining of components on a microscopic scale, which is expensive and time consuming and does not give consistent results, leading to rejection of components during quality control assessment prior to
35 use or to inconsistent operation of the device. Furthermore, the need to be capable of enduring the very high pressure surge, possibly as high as 600 bar, when the device is actuated requires

the use of mechanically strong components. Again, this adds to the cost of the device.

In PCT Application No GB91/02147 there has been described a form of construction which incorporates an integral one way valve and filter in the nozzle assembly to prevent air being sucked into the device through the discharge nozzle when the piston is being retracted to draw the metered dose of fluid from the reservoir and to prevent blockage of the fine nozzle aperture by solid particles entrained in the fluid. In a preferred form of such a construction a cylindrical plug is a push fit in a chamber immediately upstream of the nozzle orifice to provide an annular passage between the internal wall of the chamber and the radially outward wall of the plug. This annular passage has a radial dimension equal to or less than the nozzle aperture and thus provides a fine filter to remove solid particles which might otherwise block the nozzle aperture. The fine annular passage also imposes a flow restraint on the movement of fluid which is overcome by the high pressure generated when the piston is driven on its forward, or discharge, stroke to allow fluid to flow outwardly through the nozzle aperture. The flow restriction, however, prevents fluid from flowing back into the device as the piston is retracted. This reduces the risk of contamination of the fresh fluid drawn into the pressure chamber from the reservoir with air or fluid from the nozzle assembly downstream of the plug. Again, such a device must be manufactured from metal to be able to withstand the pressure surge as the device is operated and thus requires high precision machining of components which is expensive.

SUMMARY OF THE INVENTION

An object of the invention, therefore, is to provide a device and a method for the manufacture of a nozzle which reduces the above problems and is capable of being made with a high degree of accuracy at low cost.

In accordance with one aspect of the invention, there is provided a nozzle with one or more nozzle outlets for the atomisation of fluids, consisting of at least two plates which are connected together, possibly by an intermediate layer, wherein at least a base plate has a grooved structure which connects the intake

side of the nozzle to the nozzle outlet(s).

An embodiment of the invention can thus provide a nozzle (also referred to herein as a nozzle assembly) which is composed of two or more plates; at least one of which, a base plate, is formed with grooves which join an intake side and atomiser nozzle outlets provided on an oppositely disposed side, whilst another plate (the cover plate), which will normally be unstructured, is placed upon the structured side of the base plate and is joined firmly thereto. A nozzle assembly consisting of three layers can consist, for example, of a structured silicon plate, a flat silicon cover plate and a thin glass plate therebetween. Of course the functions of the base and cover plates can be reversed with a structured cover plate overlying an unstructured base plate.

The cavities in the nozzle assembly are usually of rectangular cross-section. However, a large number of variations is possible if the nozzle assembly are manufactured by way of the method described hereinbelow and related methods known to those skilled in the art. By using different etching methods, it is also possible to produce base plates with grooves of other cross-sections if so desired.

If the cover plate is structured in addition to the base plate, then it is possible to obtain other cross-sections, e.g. cross-sections of approximately circular shape. When both the base plates and cover plates are structured, both plates are usually given identical structures. Other variations are possible if the base plate and cover plate are structured in different ways but adapted to cooperate with one another.

According to another aspect of the invention, there is provided a spray generating device comprising a nozzle assembly for forming the spray of droplets from a stream of fluid fed to it by a means for generating a flow of fluid, which nozzle assembly comprises:

- a. a first member having formed in a first face thereof one or more fluid inlet(s) adapted to feed fluid to one or more fluid outlet(s) located at an edge of the first member, the outlet(s) being configured so that a spray of droplets is formed by the fluid outlet(s) from a stream of fluid

flowing through them;

- b. a second member secured upon the said first face of the first member and adapted to co-operate with the first member to provide one or more conduits each adapted to connect a said fluid inlet in fluid flow communication with a said fluid outlet, preferably the said second member co-operates with one or more channels formed in the said first face of the said first member to define the walls of one or more fluid conduits connecting said fluid inlet(s) to said fluid outlet(s); and
- c. means for connecting said fluid inlet(s) to said means for generating the flow of fluid.

It is preferred that the fluid flow conduits each incorporate one or more narrow bore portions which have transverse dimensions and a transverse cross-section which is less than that of the fluid outlet(s) and which act as filters to protect the outlet(s) against blockage by solid particles in the fluid. The narrow bore portions also provide a flow restriction in the conduits which act as one way valves of the type described in PCT Application No GB 91/02147.

Preferably, the first member is a substantially planar member and the channel(s), fluid inlet(s) and fluid outlet(s) are formed in a face of said first member with the longitudinal axes of the channel(s) and of the inlet(s) substantially parallel to the plane of said face and the plane of the outlet aperture substantially normal to the plane of the first member; and the said second member is a second generally planar member which is preferably of substantially of the same plan shape and size as the first member.

The means for connecting the fluid conduits of said first member to the flow generating device is preferably provided by locating one or more of the fluid inlet(s) at an edge of the first or second members and providing means by which the first and/or second members can be mechanically connected to the flow generating device, for example by being a sealed push fit into the fluid outlet of the flow generating device. Alternatively, a third member can be provided which is secured to a second face of either the first or

the second member and which is provided with a fluid conduit adapted to be put in fluid flow communication with the means for generating the fluid flow. For example, the third member can carry a spigot which is a push or other fit in the outlet to a pump mechanism of the type described in PCT Application No GB91/00433 and which has a bore which communicates with the fluid inlet(s) in the first member. The bore of the spigot can act as the cylinder of the pump mechanism in such a device.

A nozzle assembly in accordance with the invention can readily be formed as a laminated unitary construction from components which have had the appropriate channels, inlets and outlets pre-formed therein by laser, chemical etching, photo-resist or other surface engraving techniques well known in the micro-forming art to achieve simple but accurately reproducible components having substantially flat opposing faces. These components can be secured together by diffusion bonding, adhesion, welding, clamping or other suitable techniques for securing them together in sealing engagement, optionally with sealing rings or other sealing interfaces between the members by simple assembly techniques.

In accordance with a further aspect of the invention, there is provided a nozzle assembly comprising:

- a. a first member, which is preferably substantially planar, having one or more fluid inlet(s) formed therein, one or more fluid outlet(s) formed at an edge of the said first member and preferably also one or more channels formed in a first face of said first member substantially parallel to the plane of said face, the channel(s) connecting the fluid inlet(s) with the fluid outlet(s) in fluid flow communication and preferably incorporating one or more narrow bore portions which are adapted to act as filters and one way valves;
- b. a second member, which is preferably substantially planar and of substantially the same plan shape and size as the said first member, located upon said first face of said first member and co-operating with said first member to provide, and/or to define with the said channel(s) where present in said first member, conduit(s) for connecting

said fluid inlet(s) with said fluid outlet(s) in fluid flow communication; and

- c. means for connecting the fluid inlet(s) of said first member in fluid flow communication with a means for generating the fluid flow.

Preferably, the fluid inlets, the fluid outlets and the connecting channels are formed wholly in the first face of the first member and the second member is a cover member secured over said first face to provide the wall forming the conduits. However, the second member can be provided with part or all of the connecting conduits, as when the second member is provided with the channels and the first member provides the closing wall for those channels. Similarly, the second member can be provided with part of the inlets and/or outlets formed therein. For example, the first and second members can have mirror image halves of the inlets, outlets and conduits cut in the opposed faces thereof whereby securing them together forms the desired whole inlets, outlets and conduits.

For convenience, the invention will be described hereinafter in terms of a first member which has the whole depth of the inlets, outlets and channels formed in the first face thereof and the second member has a substantially flat face which provides a wall to complete the inlets, outlets and conduits.

The fluid outlet(s) act as the spray generating means of the nozzle assembly. These can therefore be simple fine bore orifices which can have rough, polygonal or other cross-sections or edges, as described in PCT Application No GB 91/02145, to form a spray of droplets from a stream of fluid passing through the outlet aperture. Thus, the aperture can have a triangular, squared or other regular or irregular polygonal shape, preferably having a maximum to minimum aperture dimension of from 1:1 to 10:1. The lip of the aperture can be rough, as when the aperture is formed by an electro-sputter erosion technique in which material is removed from the first member by striking an arc between the member and an electrode. However, it is preferred that the aperture have a sharp lip thereto over which the fluid flow changes direction sharply to achieve the secondary flow in the mainstream of the fluid flow. Typically, the change in direction will be equivalent to at least

5%, preferably from 10 to 30%, of the total flow changing direction through 90°. Preferably, the change in direction occurs sharply, notably within an axial distance of less than five, preferably less than one, diameters of the width of the flow. Such change in
5 direction, or secondary flow, can also be achieved by forming the aperture with an axially inwardly directed lip as opposed to an externally directed lip, for example where the aperture diverges along the line of flow and has an equilateral triangular plan shape with its apex directed against the intended line of flow of the
10 fluid through the aperture. Alternatively, two channels can intersect within the plan area of the first member to form a turbulent flow in a single channel leading to the fluid outlet aperture located at the edge of the first member.

Alternatively, the change in direction can be caused by
15 forming a flap or partial obstruction to the aperture whereby at least part of the flow of fluid through the aperture is subjected to a sharp change in direction by the flap or obstruction. Such a flap or obstruction acts on from 10 to 80% of the effective cross-section of the flow. Other forms of secondary flow generators are described
20 in PCT Application No GB 91/02145 and the subject matter of that application is incorporated herein by this reference.

Where the fluid outlet is formed so as to generate the spray by means of the secondary flow caused by the shape and configuration of the outlet, we have found that satisfactory sprays
25 can be produced with flow generating devices which generate a pressure low as 25 bar where comparatively large droplets are required, for example from 30 to 150 micrometres mass median droplet size. However, when droplets with a mass median size of less than about 20 micrometres are required, it will usually be necessary to
30 use a flow generating device which generates a pressure of at least 50 bar, typically 100 to 400 bar.

The droplet size will also be affected by the nozzle aperture size. Thus, in general we have found that it is desirable to use apertures with maximum transverse dimensions of less than 500
35 micrometres, for example 50 micrometres or less. Where fine droplet sized sprays are required, the maximum transverse aperture dimension is preferably less than 30 micrometres. Such dimensions correspond

to cross-sectional areas of from 5 to 2,500, eg. 10 to 500, square micrometres . Where coarse sprays are required, the aperture size can be to 100 micrometres maximum transverse dimension.

As indicated above, the desired spray can also be formed by
5 causing two or more jets of fluid to impinge upon one another or for a single jet to impinge on a fixed impinger. In this case it is not necessary that the nozzle aperture cause any significant amount of secondary flow and a smooth lipped substantially circular, squared or rectangular aperture can be used. In order to produce an
10 acceptable jet, it is preferred to use a flow generating device which generates a fluid pressure of from 50 to 400 bar and an aperture with a maximum transverse dimension of from 5 to 100 micrometres. Where two impinging jets are used, it is preferred that the line of flight of the jets include an angle of from 60 to
15 150°, preferably about 90 to 120°, at the point of impact and that the impact occur from 25 to 500, eg. from 30 to 100, micrometres from the plane of the edge of the first member at which the fluid outlets are located. Where a jet of fluid strikes a fixed impinger, it is preferred that this be located in the line of flight of the
20 jet at a point before the jet begins to break up into separate droplets, typically less than 1000 micrometres downstream of the fluid outlet and that the surface of the impinger be angled to the line of flight of the jet so that the impinger is self cleaning and does not retain a significant amount of fluid thereon. A suitable
25 form of such a self cleaning impinger is described in PCT Application No GB 92/0668.

Embodiments of the invention are described hereinafter in terms of the use of two fluid outlets to form twin jets of fluid which impinge upon one another to form a spray of droplets.

30 The fluid outlets are fed with fluid under pressure from the fluid flow generating means via the fluid inlet and the conduits formed in the first member. The fluid inlet is conveniently provided by a simple circular or other shaped chamber in the first member which is in direct fluid flow communication with the flow
35 generating device via inlets at the edge of the first member or via a spigot or other means by which the nozzle assembly is mounted on the flow generating device. As indicated above, this spigot can

form part of the pump mechanism of the flow generating device and can be carried by a third planar member which is mounted on the opposed face of the first member to that carrying the second member. However, the first member could be formed with the spigot formed
5 integrally therewith, for example as a metal or other tubular projection from the second face of the member.

Embodiments of the invention will also be described hereinafter where a third member carries the spigot protruding therefrom.

10 A single fluid inlet chamber in the first member typically receives all the fluid fed to the nozzle assembly and distributes it to the fluid outlet(s). If desired, the fluid inlet chamber can be elongated in one or more directions to assist uniform flow of the fluid to the fluid outlets. For convenience, the invention will be
15 described hereinafter in terms of a single generally circular inlet chamber.

The inlet feeds fluid via one or more conduits to the fluid outlet(s). As stated above, these conduits are formed by etching, engraving or otherwise forming suitable channels in the face of the
20 first member, for example by inserting fine wires or ablatable material filaments into the interface between the first and second members so as to form depressions in the opposed faces of the members and then removing or burning away the wires or filaments to form the channels and outlets. The channels will typically have a
25 generally squared cross-section since they are in general formed by the removal of material uniformly across the whole width of the channel.

As stated above, it is particularly preferred that the channels have one or more portions which are narrower than the
30 aperture of the fluid outlet so that these portions act as filters to prevent solid particles which might block the fluid outlets from reaching the outlet in a manner similar to the fine bore passages described in PCT Application No GB 91/02147. Such a fine bore portion of the conduit preferably has cross-sectional dimensions
35 which are from 10 to 80% of those of the fluid outlet. It is also preferred that the fine bore portion of the channel cause a pressure drop of from at least 0.5 bar in the flow of fluid through the

portion of the channel so that the narrow bore portion inhibits withdrawal of fluid from the channel during retraction of any pump mechanism used to generate the flow of fluid through the nozzle assembly. Preferably, the pressure drop is the minimum required to prevent return flow of fluid and air from the nozzle to the flow generating device and yet does not deleteriously affect free flow of the pressurised fluid through the channels and the fluid outlet(s). The optimum flow restriction can readily be determined for any given case, but will usually achieve a pressure drop of from 1 to 3 bar or more.

Whilst the channels may communicate directly with a fluid outlet, it is preferred that the narrow bore portions of the channels be located between the fluid inlet and a plenum chamber which feeds fluid to the fluid outlets. Such a plenum chamber aids uniform distribution of the flow of the fluid to the outlets where more than one outlet is used, for example where two outlets are used to form two jets of fluid which impinge upon one another. The plenum chamber may also be configured so as to assist the formation of secondary flow in the fluid as it flows to the outlet(s), for example by incorporating curves or other wall configurations for causing swirling in the fluid flow.

The nozzle assembly finds use on a wide range of fluid flow generating devices, such as pressurised gas or aerosol type dispensers in which fluid is caused to flow out of a container by the expansion of a propellant gas. However, the nozzle assembly is of especial application in forming a spray from a flow of fluid generated by a manually operated pump mechanism, thus avoiding the use of a propellant gas. The pump mechanism may be of the type described in PCT Application NO GB 91/00433. The nozzle assembly is mounted by any suitable means upon the outlet from the pressure chamber of the pump, for example by a screw, bayonet, push or other fit, and receives the metered dose of the fluid when the spring or other energy source is released and the pressure within the pressure chamber rises. Other forms of fluid flow generator may also be used, provided that they can achieve the required pressure rise to discharge the fluid through the fluid outlet(s) as a spray with the desired mass median droplet size.

As indicated above, the channels, the fluid inlet, the plenum chamber and the fluid outlets are all formed in one face of the first member, although the fluid inlet can extend through the thickness of the first member to communicate with the fluid flow generating means. Such a design readily lends itself to fabrication by selectively removing the necessary material from the required areas of the surface of the first member by etching or engraving techniques which can be accurately controlled to form the very fine features required for the present invention. Such techniques are known and used in the formation of channels and nozzle outlets in the manufacture of ink jet printer heads, see for example US Patent 4915718 and European Application No 0397441, and in general comprise the application of a mask to a photo-resist or chemically etchable material; sensitizing the material and removing the material in the required areas by application of a suitable etching material. Alternatively, the channels can be formed by burning away the material using a laser or by striking an arc between the member and an electrode. Other methods for forming the features on the surface of the first member may be used, for example milling or fine engraving of silicon, ceramic or metal plates.

Such techniques can be used to remove accurately controlled amounts of material from accurately defined selective areas of the surface of the first member to form, within reason, any desired shape of channel, fluid outlet or other feature. Such techniques are especially applicable to planar surfaces and it is therefore preferred that the surface of the first member in which the features are to be formed is substantially flat. However, they may also be applied to curved or irregular surfaces so that the surface of the first member need not be flat if desired.

The components of the nozzle assembly for use in the present invention thus readily lend themselves to manufacture by such techniques from a wide range of materials which are conventionally used in such techniques, for example photo-resist plastic, silicon, ceramics, metals. Such materials can be produced to a high degree of accuracy and are often strong enough to resist the stresses due to the high pressure rises imposed upon the nozzle assemblies without the need for supporting framework or other

structures. Furthermore, being substantially flat members, the first, second and third members can readily be secured to one another in sealing engagement. Thus, metal, silicon or ceramic plates can readily be bonded together by pressure welding or by
5 diffusion bonding in which an interface of a suitable metal, for example gold, is located between the opposed faces of the member and bonding caused by the application of heat and pressure. Such diffusion bonding has the advantage that little distortion of the shape of the channels and other features in the face of the first
10 member is caused, thus preserving the accuracy of the features once formed.

Alternatively, the first and second members of the nozzle assembly can be secured in position by the use of adhesives, conventional ultra-sonic or other welding techniques or by
15 mechanically clamping the components together. If desired, sealing rings or gaskets can be located between the opposing faces to ensure a fluid tight seal. However, where the faces of the members are sufficiently flat, this will usually not be necessary and the adhesive or metal diffusion interface between the opposed faces will
20 ensure an adequate seal.

If desired, the assembled nozzle assembly can be located within a supporting housing or the like to impart the necessary strength to the assembly to withstand the high pressures generated by the devices of our PCT Application No GB91/00433.

25 In particular, the nozzle assemblies according to the invention are preferably manufactured by means of the following steps:

- structuring a batch of base plates with grooves;
- joining the base plates and cover plates; and
- 30 - separating the individual nozzle assemblies.

The grooved finish is preferably produced simultaneously for a plurality of nozzle assemblies over a large surface area in a parallel manufacturing process, and then the base and cover plates are joined in one step (i.e. a batch process). Thereafter, the
35 composite structure is divided into individual tiles or chips, and the inlet and outlet openings of the nozzle assemblies are opened up.

There are special advantages with this type of manufacture. The batch manufacture first of all makes it possible to produce individual component parts which are particularly cheap, and which could only be produced using serial processing methods at
5 considerably greater expense. The batch manufacture secondly guarantees a specific constant quality for all parts which can be reproduced repeatedly under the same processing conditions, a quality which is never subject to gradual change, as would be the case in serial processing methods due to wear of the worktool(s).

10 Also, the position and placement of the parts in the process are determined likewise by the overall design, and does not therefore have to be altered by time-consuming sorting- or handling machines.

Thus, the present invention relates to new, highly
15 effective nozzle assemblies and methods which can be used to produce large numbers of these nozzle assemblies so that they are of constant high quality; in addition, a filter - possibly a multi-staged filter - can be integrated in the nozzle assembly.

The materials and methods which can be used according to
20 the invention produce nozzles which excel through a number of advantages:

- high mechanical stability;
- a high degree of resistance to chemical influences
(e.g. aqueous medicine solutions, acids);
- 25 - low surface roughness of the grooves;
- low influence of larger pressure- and temperature differences;
- valve function of the nozzle members filled with fluid with lower pressures.

The nozzle assemblies according to the invention can be
30 very small in size, so that the dead volume is very small, and therefore when the nozzle members are used in the therapeutic domain (production of inhalation aerosols) the dead volume accounts for only a small fraction of the quantity of fluid to be diffused.

Surprisingly, the provision of shallow grooves means that
35 no problems result with transportation of the fluid, despite the fact that small flow cross-sections are likely to give problems with the boundary layers.

The nozzle assembly of the invention thus offers a simplified design which does not required expensive and time consuming machining of components and which enables components to be made reproducibly to a high degree of accuracy and which can readily
5 be assembled to form the nozzle assembly.

The invention also provides a method for producing a nozzle assembly for use in a spray generating device of the invention, wherein the fluid outlet(s), the fluid inlet(s) and the connecting channels are formed in the face of the first member by selectively
10 removing material from that face; and securing a second member upon the said first member whereby the face of said second member opposed to said first member co-operates with the said fluid outlet(s), fluid inlet(s) and said channels to form the fluid flow paths for said nozzle assembly.

15 DESCRIPTION OF THE DRAWINGS:

The invention will be described in more detail hereinafter, by way of example only, in terms of a number of exemplary embodiments with reference to the accompanying drawings, in which:

Figure 1 is a schematic perspective view of a preferred
20 embodiment of a nozzle assembly in accordance with the invention and Figure 1A is a detail of a possible variant of a nozzle outlet for the assembly of Figure 1;

Figure 2 is a schematic plan view of part of a second preferred embodiment of a nozzle assembly in accordance with the
25 invention, Figures 2A and 2B relating to details thereof;

Figure 3 is a schematic plan view of part of a third preferred embodiment of a nozzle assembly in accordance with the invention employing twin nozzle outlets, Figures 3A and 3B relating to details of that nozzle assembly;

30 Figures 4, 4A, Figures 5, 5A, Figures 6, 6A and Figures 7, 7A relate to specific examples of twin nozzle outlets for a nozzle assembly in accordance with the invention;

Figure 8A relates to a detail of a nozzle assembly comprising a plurality of nozzle outlets;

35 Figure 9 relates to a detail of a nozzle assembly employing a nozzle outlet with an impinging element;

Figure 10 and Figures 11A, 11B, and 11C relate to

alternative designs for a nozzle outlet for use in a nozzle assembly in accordance with the invention;

Figure 12 is a schematic plan view of part of a nozzle assembly in accordance with a further embodiment of the invention;

5 Figure 13 is a schematic plan view of yet a further alternative embodiment of a nozzle assembly in accordance with the invention;

10 Figures 14, 15, 16, 17, 18 and 19 relate to yet further examples of nozzle outlet designs for a nozzle assembly in accordance with the invention; and

Figure 20 represents various stages in the manufacture of a nozzle assembly in accordance with the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT:

Figure 1 is a schematic exploded perspective view from above of an example of a nozzle assembly 10, or of part thereof, in accordance with the invention.

5 Figure 1 shows a base plate 11 and a cover plate 12, which has been lifted off the base plate 11 for illustrative purposes. In use, with the cover mounted on the base plate 11, fluid is passed under pressure through a filter 13 at an intake side 16 of the nozzle assembly 10, which filter is composed of a number of mutually parallel narrow grooves 17, the cross-section of each groove 17 of which should be less than the cross-section of a nozzle outlet 14. From the filter 13, the fluid passes under pressure into the channels 15, from where it is expelled through the nozzle outlet 14.

15 Figure 1a shows a variant of the grooved plate 11, in which the nozzle 14' is bent, and instead of two channels 15 which extend at an obtuse angle relative to each other as in Figure 1, a series of parallel channels 15' is provided.

20 Figure 2 shows another version of a nozzle assembly 20 in accordance with the invention. This drawing shows a view from above onto a grooved plate 21, where - as seen from the intake side 16 - a coarser filter 23 with grooves 27 is followed by a finer filter 28, which is shown in a cut-out sectional drawing on a larger scale in Figure 2a. The filter 28 communicates with the nozzle outlet 24 via channels 25. The right angles disposed between the channels support the cover plate (not shown) and reinforce its connection to the

grooved plate 21.

It has been found that in the case of individual nozzles outlets like those in Figures 1 and 2, more favourable droplet spectra can be produced if the nozzles 4 are short in the flow direction. If twin nozzles outlets (see for example Figure 3) are provided, longer (e.g. conical or tapering) nozzles can give good atomization results because the fluid jets are split into the finest droplets when they collide.

Figure 3 shows part of a nozzle assembly 30 in which the two-stage filter 37, 38 and the five parallel channels 35 generally correspond to the filter 27, 28 and channels 25 of the embodiment shown in Figures 2/2a. The nozzle outlet 25 according to Figure 2 is, however, replaced here by the twin nozzle outlet 39a/39b. As can be seen from the enlarged drawing in Figure 3b, the twin nozzle outlets 39a/39b direct two jets at an angle of 90° relative to each other. Due to the collision of the jets, particularly good atomization is obtained. The twin nozzle outlets can be modified in various ways. Thus, both jets can, if so desired, be oriented towards each other at a more acute angle or at a more obtuse angle (about 20° to 160° , preferably 60° to 150° and more preferably 90° to 120°). In addition the cross-section of the nozzle outlets can be selected differently; for example the strong tapering of the outlets 39a/39b in Figures 3, 3a, may be dispensed with. As illustrated in Figures 3b, it is desirable for the jets to impinge a slight distance away from the nozzle outlets. Smaller orientation deviations do not then result in incomplete collision of the jets on one another. The edges of the structure may be bevelled where long term use of the channel plate might cause breakages to the edges which could cause the filter or nozzle to become blocked.

Figures 4, 5, 6 and 7 represent plan views of alternative configurations of a twin nozzle outlet. Each of these Figures shows the nozzle outlet region only of one plate of a nozzle assembly. For illustrative purposes, a filter arrangement and the channels for the passage of fluid from the filter arrangement are not shown in Figures 4 to 7. The filter arrangement and channels may be configured either as shown in Figure 1, or in Figures 2/3, or

another suitable manner. The shaded areas represented raised portions of the grooved plate 21 with the portions not shaded representing the grooved or recessed areas.

Figures 4A, 5A, 6A and 7A represent enlarged views of the nozzle outlet area of the grooved plates 314, 315, 316 and 317 shown, respectively, in Figures 4, 5, 6 and 7. The dimensions shown in Figures 4/4A, 5/5A, 6/6A and 7/7A are in millimetres. The depth of the grooved (i.e. non-cross hatched) portions is 0.005mm below that of the hatched areas in those drawings.

In Figure 4A, each nozzle outlet portion has a length of 0.04mm and a constant breadth of 0.008mm. As stated before, the depth of the nozzle outlet is 0.005mm. The central island 391 has a radius of 0.1122mm. The nozzle outlets are arranged so that the fluid jets exit the nozzle outlets at 90° with respect to each other and collide at 0.025mm from the outlet surface 398 of the nozzle assembly.

In Figure 5A, the outlet nozzles are shown to have a length of 0.08mm with a constant width of 0.008mm, and a depth, as before, of 0.005mm. The nozzle outlets are configured so that the fluid jets exit at 90° with respect to each other and collide at a distance of 0.0025mm from the outlet surface 398 of the nozzle assembly.

In Figure 6A, the nozzles have the same configuration as in Figure 5A. However, in Figure 6A, the island portion 392 is configured differently from the island portion 391. It will be seen that the inner surface of the island portion 391 and also the inner surface of the outer wall regions 393 are configured to have a concave radius of curvature of 0.2mm.

In the arrangement shown in Figure 7A, the outer wall and island portions are configured similarly to those in Figure 6A. Also, the overall nozzle outlet configuration is similar to that in Figure 6A, with the exception that the nozzle outlets are arranged to be slightly tapered, having a width of 0.007mm at the inner end and a width of 0.008mm at the outer end. This configuration is intended to facilitate the removal of particles through the nozzle should such particles pass the filters shown in Figures 2/3 and

reach and enter the nozzle outlet portions 397a/397b.

Figure 8 shows the nozzle outlet region 41 of a nozzle assembly according to the invention wherein six nozzle outlets 42a to 42f are oriented in such a way that the jets which issue therefrom meet at a point. This can avoid a situation where the other jets no longer collide if one of the nozzles becomes blocked. In Figure 9, an impact element 43 is provided in the mouth 44 of a nozzle outlet 45, which widens towards the outside. Similarly, in Figure 10, a vortex-generating structure 46 is fitted into a nozzle outlet which promotes a greater vortex formation of the issuing fluid. Figures 11a to 11c also show a section of the nozzle assembly in the region of the nozzle outlet, wherein various geometric shapes for the nozzle outlets are illustrated at 48a, 48b and 48c.

To improve the atomization, the nozzle outlet can also be designed in such a way that it is somewhat longer and is provided with a region of reduced thickness, into which region an air channel or air channels open so that - as with a water-jet pump - air is carried into the jet of fluid.

It has been found that a favourable droplet, or particle size, is typically obtained if the narrowest cross-sectional surface area of the nozzle outlet, or outlets, is between about 25 and 500 μm^2 . When the grooves in the base plate are, for example, 5 μm in depth, it is possible for the nozzles to be kept to a comparable width and typically their width-/breadth ratio is between about 1 : 1 and 1 : 20. Relationships outside these regions are also possible. The skilled person can, if necessary, optimize the appropriate nozzle outlet dimensions by carrying out tests as the characteristics of the fluid to be sprayed, as the surface tension and the viscosity are also relevant to a certain degree. The specific characteristics of the fluid to be sprayed need to be considered in particular when that fluid includes an organic solvent or an oil rather than a watery fluid, of the type for which the present device is primarily, but not exclusively, intended.

To exclude the possibility of blockage of the filters, even over long-term use, the filter (6) can also be designed so that it is of zig-zag, meander-like or arcuate configuration. Thus, a

greater number of through passages (of constant size) is formed. In addition, if so desired, instead of a one- or two staged filter it is possible for three-staged filters to be provided with respectively narrower through passages. In each case, however, it must be ensured that a sufficiently high pressure is available at the nozzle despite the reduction of pressure in the filter system.

The cross-sectional shape of the nozzle outlet or the sum of the cross-sections of the nozzle outlet can be varied within further boundaries. At a given pressure, the cross-section of a slitted nozzle outlet can be considerably greater than the cross-section of a square or round nozzle outlet, without the droplet spectra being impaired. The cross-section of the nozzle outlets or the sum of the cross-sections is usually between 5 and 2000 μm^2 , preferably between 20 and 1000 μm^2 and in particular between 25 and 500 μm^2 . This also applies when two or more parallelly orientated nozzle outlets are provided.

When, also, in particular in the case of very narrow or very flat nozzle openings, surface edge effects play a large role, the skilled person needs to take account of the knowledge of the physics concerning hydraulic cross-section in the determination of the arrangement of the nozzle outlets and the choice of the dimensions therefor.

Figure 12 is a schematic representation of part of another nozzle assembly in accordance with the invention. Figure 12 represents a plan view of a base plate 50 in which channels are formed. An inlet 52, which extends perpendicularly to the plane of the base plate 50, opens into a chamber 54. The chamber is connected via one or more filter stages 56 to twin nozzle outlets 58a and 58b. The provision of the perpendicularly extending inlet enables a compact construction of the nozzle and/or nozzle assembly.

Figure 13 shows an example of nozzle assembly 60 with an inlet disposed perpendicularly to the connecting surfaces as in Figure 12.

In the nozzle assembly of Figure 13, a first plate member 61 has a first set of two channels 62 in its upper face which debouch at one edge of the plate. The resultant apertures at the

plate edge form two fluid outlets which, in the present example, will form two impinging jets of fluid angled at about 100 to 120° to one another when fed with fluid. Preferably, the edge of plate 61 is indented at this point to provide a recess in the face of the nozzle assembly within which the two jets of fluid can impinge and form the spray of droplets. The lips of the mouths of the depressions 62 where they intersect the edge of the plate 61 are sharply formed and not rounded. The face of plate 61 also carries a second set of channels 63, which are of smaller cross-section dimensions than the first channels 62. These act as the narrow bore portions linking a fluid inlet 64 cut through plate 61 with the first set of channels 62 and serve to filter out solid particles which might otherwise block the first channels and the fluid outlets. Typically, the second channels 63 each have a cross-sectional area which is approximately 10% or less of the cross-sectional area of each of the first channels 62, so as to give a pressure drop of about 10% of the applied pressure from the flow generating device, for example of from 0.2 to 25 bar, across the second channels. Typically, the second channels 63 will have at least one cross-sectional dimension which is about 50% of the corresponding dimension of the first channels. Since the channels are typically formed by removing a uniform depth of material from the surface of the first plate member, the channels will usually have a constant depth and variations in the dimensions or area of the channels is achieved by varying the width of the channels.

The second set of channels 63 debouch into a plenum chamber 65 cut into the top face of plate 61. If desired, the chamber 65 can be cut through the thickness of plate 61, but it is preferred to form chamber 65 within the thickness of plate 61 as shown. Chamber 65 is preferably configured so that the first channels 62 exit from opposed corners of the chamber 65 and a septum 66 of the material of the surface of plate 61 can be retained between the channels 62 to aid changes in direction of flow of fluid within chamber 65 and to direct the flow into the first channels 62.

A second plate member 70 is shown overlying but detached from the first plate member 61. When this second plate 70 is secured to the top face of plate 61 it provides the top faces to the

channels 62 and 63 so that they form two groups of conduits which form the nozzle outlets 62 and the filter bores 63.

A third plate member 80 is also shown detached and underlying plate 61. Plate 80 carries a fluid inlet spigot 81 by which the nozzle assembly can be mounted on the outlet of a pump or other fluid flow generating device (not shown). The spigot 81 has an internal bore 82 which is in register with the inlet 64 in plate 61 and can form part of the pump mechanism of the flow generating device as indicated above. The exterior of spigot 80 can carry screw thread or other means (not shown) by which the spigot is secured to the pump or other flow generating means.

The plates 61, 70 and 80 can be formed from any suitable material, for example a photo-resist glass, ceramic or plastic or a metal, and the features in plate 61 formed by removing material from plate 61 in the desired locations by a conventional chemical etching process. Alternatively, the features can be formed by removal of material using a laser. Since the features are formed on the exterior of a substantially flat member, there is no need for complex machining of components or assembly of sub-components.

The plate members present opposed substantially flat faces to one another and can readily be bonded or otherwise secured to one another using any suitable technique, for example by ultra-sonic welding, by adhesion or by clamping them together using a metal surround which is crimped into position.

In operation, fluid at pressure is delivered to the bore 82 of spigot 81, from which it flows through inlet chamber 64 in plate 61, through the filter channels 63 to the plenum chamber 65 and thence to the nozzle channels 62. The fluid exits from the two nozzle channels as jets of fluid which impinge on one another to form a spray of fine droplets.

By applying the fluid at a pressure of at least 40 bar to nozzle channels having a mean diameter of about 10 micrometres, droplets with a mean droplet size of less than 10 micrometres were produced.

The nozzle assembly could be manufactured repeatedly to close tolerances and samples of the nozzle assembly repeatedly performed to give the same droplets sized spray.

Accordingly, from a further aspect, the present invention provides a nozzle and filter assembly characterised in that it comprises:

- a. a first plate into which are formed:
 - 5 1: a first group of channels having one end thereof located at the plate boundary; and
 - 2: a second group of channels of equal or smaller size than said first group; and
 - b. a second plate that sealingly engages said first plate so
10 the surface of said second plate co-operates with the first group of channels in said first plate to form a first series of fluid outlets and with said second group of channels in said first plate to form a second set of fluid
15 conduits having a cross-sectional size equal to or smaller than the said fluid outlets, whereby when a fluid is passed through said second group of channels they act as a filter to protect the first set of channels which act as spray forming fluid outlets; and
 - c. means of connecting said two sets of channels.
- 20 Preferably the nozzle assembly is connected to means for supplying first set of channels with fluid.

In the alternative forms of plate 61 shown in Figures 14 to 19, the outlet to the channels 62 is modified so that the fluid issues from the outlets as a spray without the need for impingement
25 of two jets of fluid. Thus, in Figure 14 the outlet 74 to channel 62 is formed as a tortuous bend to induce secondary flow as the fluid exits the channel 62. To achieve a spray of droplets with a mass median droplet size of about 5 micrometres, the fluid outlet by channel 62 is from 2 to 15, preferably from 3 to 8, micrometres
30 square in cross-section.

In the alternative form shown in Figure 15, a flap 85 is formed at the mouth of channel 62 and the edge of plate 61 is cut away in the area 86 downstream side of the flap.

In the alternative shown in Figure 16, the channel 62 is
35 formed with a knife edge entry 91 having a gap 93 of from 4 to 30 micrometres and channel 62 diverges from that knife edge entry at an included angle 94 of from 60 to 150°, preferably from 90 to 120°.

In the modification shown in Figure 17, the knife edge 101 is formed at the exit to channel 62 at the edge of plate 61 and sufficient wall thickness 102 is retained between the edge of the plate and the plenum chamber 65 to ensure the rigidity and strength of the knife edge.

In the alternative shown in Figure 18, the side walls of channel 2 are radially indented to provide a series of projections 111, 112 into the flow of fluid through the channel which induce secondary flow in the fluid as it passes through the mouth 113 of the channel. Typically, with a channel having a maximum mouth cross-sectional dimension of from 5 to 20 micrometres, the projections 51 and 52 will be from 3 to 8 micrometres.

In the modification of the device of Figure 13 shown in Figure 19, a septum 120 is formed within the plenum chamber which is separated from the wall of the chamber to provide two passages 121 and 122 which form two impinging flows of fluid in a swirl chamber 123 which debouches into a single outlet channel 62 to provide the secondary flow to form a spray as the fluid exits the mouth 124 of channel 62.

As indicated above, the depth and width of the channels formed in the first plate depend on the application of the nozzle assembly. For instance, when the nozzle assembly is used to spray hair sprays, the total cross-sectional area of the fluid outlet channels is typically 1500 square micrometres. If a single channel is used, this will be typically 40 microns deep by 40 microns wide. To achieve the required particle size of typically 40 micron mass mean diameter using such a nozzle assembly, fluid at a pressure of between 30 and 150 bars is used.

If the nozzle assembly is used to spray lung deposited drugs for administration by inhalation, then typically the total cross sectional area of the outlet channel (e.g. 62) will be between 30 and 200 square micrometers. If a single outlet channel (e.g. 62) is used, this will typically be 10 microns deep by 10 microns wide. The operating pressure required to achieve a spray with a mass median droplet size of less than 6 micrometres will be between 100 and 400 bars.

The nozzle assembly of the invention may be used in other

applications where a simple, rugged device is required, for example in fuel injection systems for internal combustion engines, where a group of spray nozzles would typically be used either formed in one plate assembly or using a number of plate assemblies.

5 A method of manufacture of a nozzle assembly in accordance with an embodiment of the invention comprising a grooved base plate and an unstructured cover plate will now be described. It will be appreciated that the method to be described can readily be modified for producing nozzle assemblies where the cover plate is structured
10 instead of or in addition to the base plate and/or where an intermediate plate is structured.

In particular, in the method to be described, the nozzle assemblies are manufactured using the following steps:

- structuring a batch of base plates with grooves;
- 15 - joining the batch of base and cover plates together; and
- separating the individual nozzle assemblies.

The base plate is preferably structured in per se known manner using a light optical lithographic technique in conjunction with an ion-supplemented reactive dry etching technique. The
20 heights of the structures are between 2 and 40 μm , usually between about 3 and 20 μm , preferably between about 4 and 14 μm and particularly between 5 and 7 μm . The material used for the base plate is preferably a mono-crystalline silicon since this is cheap and available in a condition (i.e. in wafers) in which it is
25 sufficiently flat and parallel and of low surface roughness, and it can be joined to the cover plate without the additional application of adhesives or other materials during the subsequent joining process. In order to produce a plurality of nozzle assemblies in parallel, a plurality of structure base plates are formed on a wafer
30 of silicon.

It will be appreciated that materials other than silicon can undergo structuring, and these can also be firmly joined to the cover plate in the subsequent joining process. Such materials are gallium-arsenide or metals such as aluminium or nickel-cobalt-
35 alloys, for example, which can likewise be joined properly to a glass plate.

A thin layer of silicon is thermally oxidised on the

surface of the wafer W (Figure 20A) to be structured. The oxide layer later acts as a mask when the groove finish is etched. A light-sensitive plastics layer L2 is then applied over the layer L1 in a centrifuging process, and allowed to solidify (Figure 20B).

- 5 The groove structures are then transferred to and developed in the plastics layer using optical light by contact copy with a mask M, to a scale of 1 : 1 (Figure 20C). In the next step of the procedure, the plastics structures act as masks for structuring the silicon oxide layer. The structuring is effected by reactive etching with
10 ion beams. During the structuring of the oxide layer, the plastics material is completely removed (Figure 20D).

The oxide layer structured in this way then acts as a mask for etching the grooves, which may be 5 - 7 μm in depth, in the silicon. When this is done, the oxide layer is also slowly removed
15 (Figure 20E).

At the end of the structuring process, U-shaped or rectangular box-shaped grooves are formed on the silicon plate, but these grooves can be of any geometric surface shape in the plan view.

- 20 With structuring of the base plate, other etching methods can be used to achieve a number of variants to give other shapes of groove which result in end products with nozzles of varying opening cross-section. Thus, for example, trapezoidal grooves can be produced by over-etching or under-etching in the appropriate way.
25 These etched forms can be produced both by isotropic dry etching methods and by isotropic wet etching methods. If anisotropically acting etching methods (both with reactive ion plasma and also with wet chemical media) are used it is possible to produce nozzles of triangular cross-section from V-shaped grooves in mono-crystalline
30 base plates. The geometric shape of the grooves can also be altered by combining etching techniques with coating techniques. Virtually any geometric shape can be produced.

- After structuring, the silicon plate is cleaned and the rest of the silicon dioxide is removed by the wet-chemical method.
35 The silicon plate is then joined (Figure 20F) to a glass plate by anodic bonding (cf. US. Patent 3,397,278 of 13.8.1968, Pomerantz, D.I. et al.)

An alkali borosilicate glass such as Pyrex, for example, (#7740 Corning) or Tempax (Schott) is suitable for anodic bonding of silicon and glass. The glass plate is placed on the structured silicon plate and is contacted with an electrode. The entire composite structure is heated to temperatures of between 200 and 500°C (preferably to about 450°C, because up to this temperature the thermal expansion coefficients are still close to one another and at the same time the alkali ions are sufficiently mobile for a fast bonding process) and a negative voltage of about 1000 V is placed between the silicon plate and the glass plate. Due to this voltage, the positively charged alkali ions move through the glass to the cathode, where they are neutralised. At the point of transition between the glass and the silicon, a negative spacial charge is formed in the glass which causes electrostatic drawing together of the two surfaces, and also results in a durable chemical bonding being formed between the glass surface and the silicon surface by means of oxygen bridging bonds.

In this connection, it is also particularly advantageous to use glass as the cover material for reasons of quality control, since it is easily possible to visually detect the efficiency of the bonded connection and also defects or foreign particles which lead to malfunctions of the component part.

However, other cover materials other than glass can be used. With high temperature loads it is possible to optimise the thermal expansion coefficients of the composite member if silicon is used both for the base plate and for the cover plate. For the joining process, a thin glass layer is applied to the two plates, e.g. in an evaporating- or sputtering method, by means of which the bonding process can then be carried out. In this case, a visual inspection can be made using infra-red viewing apparatus.

After the bonding process, the composite structure (see Figure 20G) is divided into individual units (e.g. squares) by a fast rotating diamond circular saw, wherein the intake openings and the outlet openings are opened up. If the cross-sectional surface area is very different at the outlet (as with nozzle-shaped outlet openings, for example), then the separating cut must be positioned with precision to a few micrometers in order to obtain a defined

nozzle outlet. Such positioning also minimises the expanse of the outward flow at the outlet.

During the separation stage, particularly high revolutionary speeds are needed (usually more than 30000 revs/min) in order to avoid expulsion at the side walls and edges of the nozzle member. Such expulsion could cause undesirable changes to the cross-section to the geometric shape of the outlet.

After dividing them up, the nozzle assemblies are cleaned and are fitted inside appropriate holders.

Although illustrative embodiments of the invention have been described in detail herein with reference to the accompanying drawings, it is to be understood that the invention is not limited to those precise embodiments, and that various changes and modifications can be effected therein by one skilled in the art without departing from the spirit and scope of the invention as defined by the appended claims.

For example, although various embodiments of the invention are described separately herein, it will be appreciated that features from the various embodiments may be combined as appropriate in yet further embodiments.

CLAIMS

1. A nozzle with one or more nozzle outlets for the atomisation of fluids, consisting of at least two plates which are
5 connected together, possibly by an intermediate layer, wherein at least a base plate has a grooved structure which connects the intake side of the nozzle to the nozzle outlet(s).
2. A nozzle according to Claim 1, comprising one or more
10 filters wherein, if two or more filters are present, the filters each become finer in the direction of flow.
3. A nozzle according to Claim 1 or Claim 2, comprising the grooves are of approximately rectangular cross-section.
15
4. A nozzle according to Claims 1, 2 or 3, wherein two or more nozzle outlets are provided which are oriented in such a way that the jets issuing from them impinge on one another in the vicinity of the mouth of the nozzle outlet.
20
5. A nozzle according to Claim 4, wherein the cross-section of the nozzle outlets becomes smaller towards their mouth(s).
6. A nozzle according to Claim 4 or Claim 5, wherein the jets
25 issuing from the nozzle outlets impinge at an angle of approximately 20° to 160°, preferably 60° to 150° and more preferably 90° to 120°.
7. A nozzle according to Claims 4, 5 or 6, a twin nozzle outlet is provided, wherein the two jets impinge at an angle of
30 approximately 90°.
8. A nozzle according to one of the preceding claims, wherein the cross-section at the intake side and inside the nozzle assembly is greater than the cross-section of the nozzle outlet or of the sum
35 of the nozzle outlets.

9. A nozzle according to one of the preceding claims, wherein a rebounding element or a vortex-generating structure is provided in the nozzle outlet.
- 5 10. A nozzle according to one of the preceding claims, wherein at least one of said plates is made of silicon/glass, silicon/glass/silicon, silicon/silicon, gallium arsenide/glass or metal/glass.
- 10 11. A nozzle according to one of the preceding claims, wherein the nozzle outlet has a region of reduced width in accordance with principle of a water-jet pump, into which region one or more small channels opens/open, through which channels air can be sucked into the jet of fluid.
- 15 12. A nozzle according to one of the preceding claims wherein the inlet is substantially at a right angle to the connecting surface, is arranged between a base and a cover plate and opens into a recess which, seen from the direction of flow, is before the
- 20 filter(s).
13. A nozzle assembly comprising:
- a. a first member having formed in a first face thereof one or more fluid inlet(s) adapted to feed fluid to one or more
- 25 fluid outlet(s) located at an edge of the first member, the outlet(s) being configured so that a spray of droplets is formed by the fluid outlet(s) from a stream of fluid flowing through them;
- b. a second member secured upon the said first face of the
- 30 first member and adapted to co-operate with the first member to provide one or more conduits each adapted to connect a said fluid inlet in fluid flow communication with a said fluid outlet; and
- c. means for connecting said fluid inlet(s) to said means for
- 35 generating the flow of fluid.
14. A nozzle assembly comprising:

- a. a first member having one or more fluid inlet(s) formed therein, one or more fluid outlet(s) formed at an edge of said first member and one or more channels formed in a first face of said first member substantially parallel to the plane of said face, the channel(s) connecting the fluid inlet(s) with the fluid outlet(s) in fluid flow communication and incorporating one or more narrow bore portions which are adapted to act as filters and one way valves to the flow of fluid through the said channels;
- 5
- b. a second member located upon said first face of said first member and co-operating with said first member to define with the said channel(s) in said first member, conduit(s) for connecting said fluid inlet(s) with said fluid outlet(s) in fluid flow communication; and
- 10
- c. means for connecting the fluid inlet(s) of said first member in fluid flow communication with a means for generating the fluid flow.
- 15
15. A nozzle and filter assembly comprising:
- 20
- a. a first plate into which are formed:
- 1: a first group of channels having one end thereof located at the plate boundary; and
- 2: a second group of channels of equal or smaller size than said first group; and
- 25
- b. a second plate that sealingly engages said first plate so the surface of said second plate co-operates with the first group of channels in said first plate to form a first series of fluid outlets and with said second group of channels in said first plate to form a second set of fluid conduits having a cross-sectional size equal to or smaller
- 30
- than the said fluid outlets, whereby when a fluid is passed through said second group of channels they act as a filter to protect the first set of channels which act as spray forming fluid outlets; and
- 35
- c. means of connecting said two sets of channels.
16. A nozzle assembly as claimed in any one of claims 13 to 15,

wherein the fluid inlets, the fluid outlets and the connecting channels are formed wholly in the first face of the first member and the second member is a cover member secured over said first face to provide the wall forming the conduits.

5

17. A nozzle assembly as claimed in any one of claims 13 to 16, wherein the fluid flow conduits each incorporate one or more narrow bore portions which are adapted to act as filters to protect the outlet(s) against blockage by solid particles in the fluid.

10

18. A nozzle assembly as claimed in any one of claims 13 or 17, wherein the narrow bore portions impose a pressure drop of from 0.2 to 25 bar to the flow of fluid through said narrow bore portions.

15

19. A nozzle assembly as claimed in any one of claims 13 to 18, wherein the first member is a substantially planar member and the channel(s), fluid inlet(s) and fluid outlet(s) are formed in a face of said first member with the longitudinal axes of the channel(s) and of the inlet(s) substantially parallel to the plane of said face and the plane of the outlet aperture(s) substantially normal to the plane of the first member.

20

20. A nozzle assembly as claimed in any one of claims 13 to 19, wherein the means for connecting the fluid conduits of said first member to a flow generating device is provided by locating one or more of the fluid inlet(s) at an edge of the first or second members and providing means by which the first and/or second members can be mechanically connected to the flow generating device.

25

21. A nozzle assembly as claimed in any one of claims 13 to 19, wherein there is provided a third member which is secured to a second face of either the first or the second member and which is provided with a fluid conduit adapted to be put in fluid flow communication with means for generating the fluid flow.

30

35

22. A nozzle assembly as claimed in any one of claims 13 to 21, wherein the fluid outlet(s) are configured so as to generate

secondary flow in the fluid as it passes through the fluid outlet(s).

23. A nozzle assembly as claimed in any one of claims 13 to 21,
5 wherein there are at least two fluid outlets and they are configured so as to form at least two jets of fluid which impinge one upon the other.

24. A nozzle assembly as claimed in claim 23, wherein the line
10 of flight of the jets is to include an angle of from 60 to 150°.

25. A nozzle assembly as claimed in any one of claims 13 to 24,
wherein the fluid inlet(s) are in fluid flow communication with a plenum chamber which is in fluid flow communication with the fluid
15 outlet(s).

26. A spray generating device comprising a nozzle or a nozzle assembly according to any one of the preceding claims for forming a spray of droplets from a stream of fluid fed to it by means for
20 generating a flow of fluid.

27. A method for producing a nozzle or nozzle assembly as claimed in any one of claims 1 to 25 or for use in a spray generating device as claimed in claim 26, wherein the fluid
25 outlet(s), the fluid inlet(s) and the connecting channels are formed in the face of the first member by selectively removing material from that face; and securing a second member upon the said first member whereby the face of said second member opposed to said first member co-operates with the said fluid outlet(s), fluid inlet(s) and
30 said channels to form the fluid flow paths for said nozzle or nozzle assembly.

28. A method as claimed in claim 27, wherein said material is selectively removed by an etching process.

35

29. A method as claimed in either of claims 27 or 28, wherein the said second member is secured to said first member by adhesion,

welding or diffusion bonding.

30. A method for the production of a nozzle according to claims 1 to 12, wherein the grooved structure is produced by the
5 combination of an optical lithographic method and an ion-supplemented etching method.

31. A method for the production of a nozzle according to claims 1 to 12, wherein the grooved structure is produced by the
10 combination of an optical lithographic method and a wet-chemical etching method.

32. A method for the production of a nozzle according to claims 1 to 12, wherein the grooved structure is produced by the
15 combination of an optical lithographic method and an additive coating method.

33. A method for the production of a nozzle according to claims 1 to 12, wherein the two plates are joined together by field-
20 supported bonding (application of an electrostatic field).

34. A method for the production of a nozzle according to claims 1 to 12, wherein a relatively large number of mutually joined
together nozzle members is produced in a slice composed of tiles of
25 appropriate size according to claims 30 to 33, and then separated into individual portions.

35. A method according to claim 34, wherein the separating
operation is effected by sawing with a fast rotating diamond
30 circular saw.



36. A method according to claim 35, wherein the separating
operation is undertaken by slitting and breaking the slice.







35 37. A method for the production of a nozzle according to claims 1 to 12, wherein grooves are produced in a base plate made of
crystalline silicon using a light optical lithographic method in

conjunction with an ion-supplemented reactive dry etching method, the grooves being of approximately rectangular cross-section, whereupon the base plate is coated with an unstructured glass plate and is joined firmly to it by anodic bonding.

5

38. A spray generating device or a nozzle or nozzle assembly substantially as hereinbefore described with reference to and as shown in any one of the accompanying drawings.

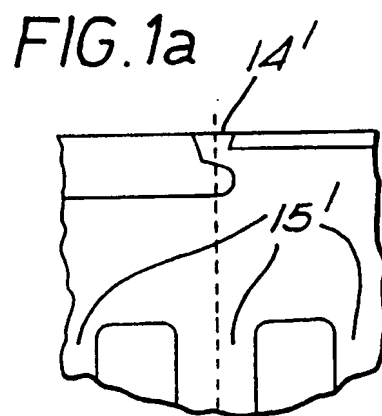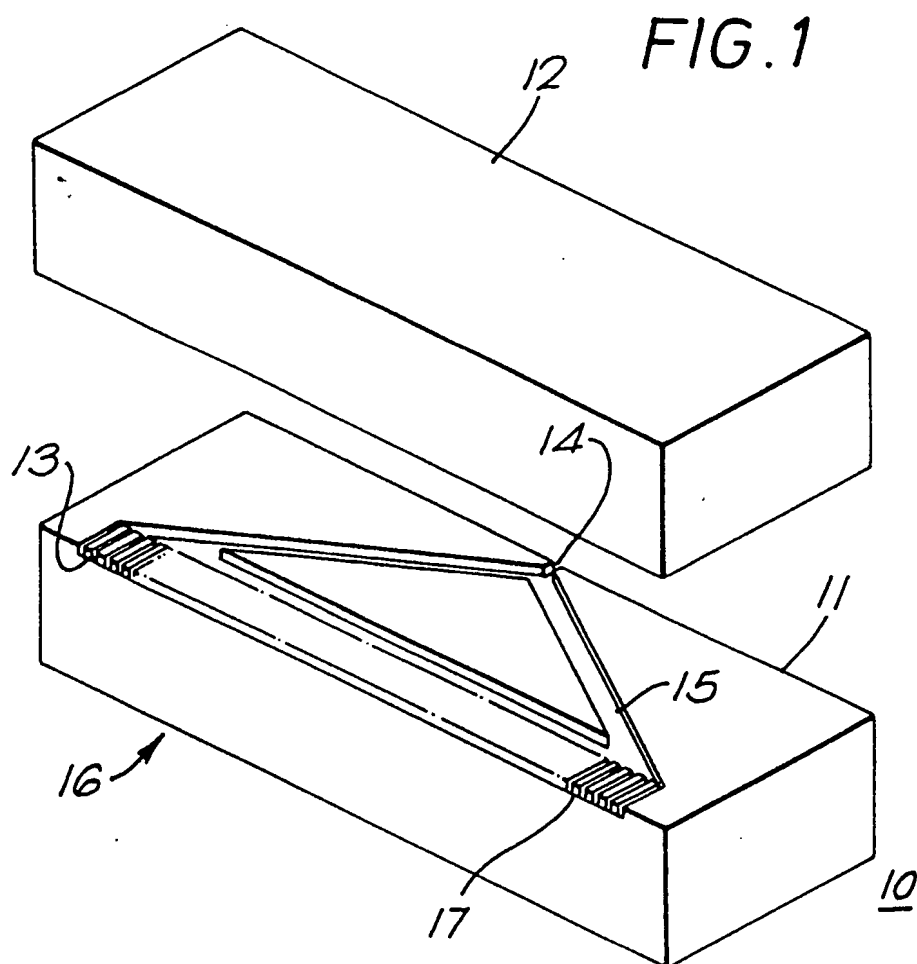

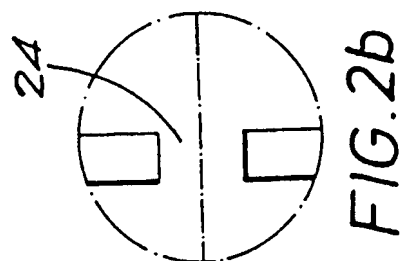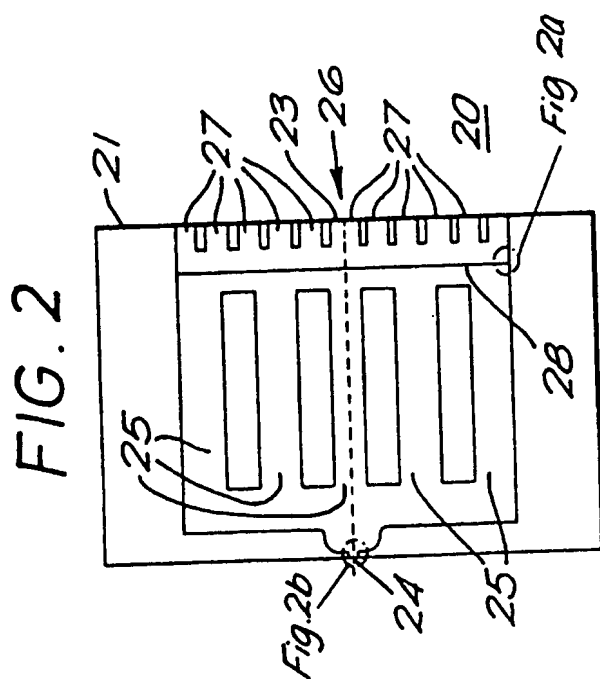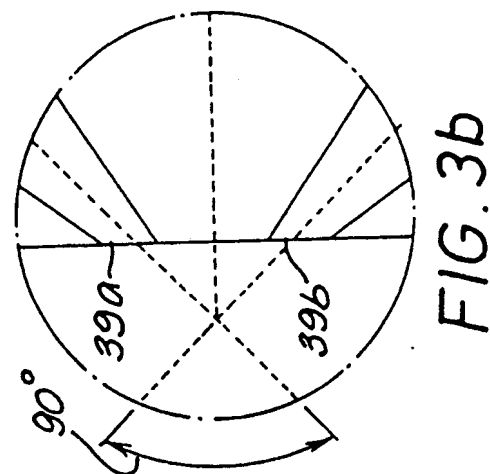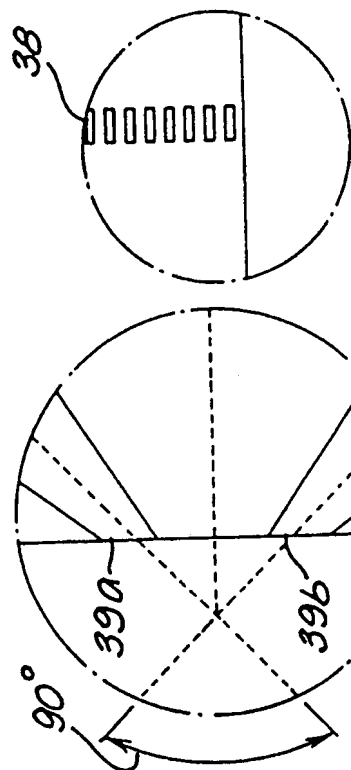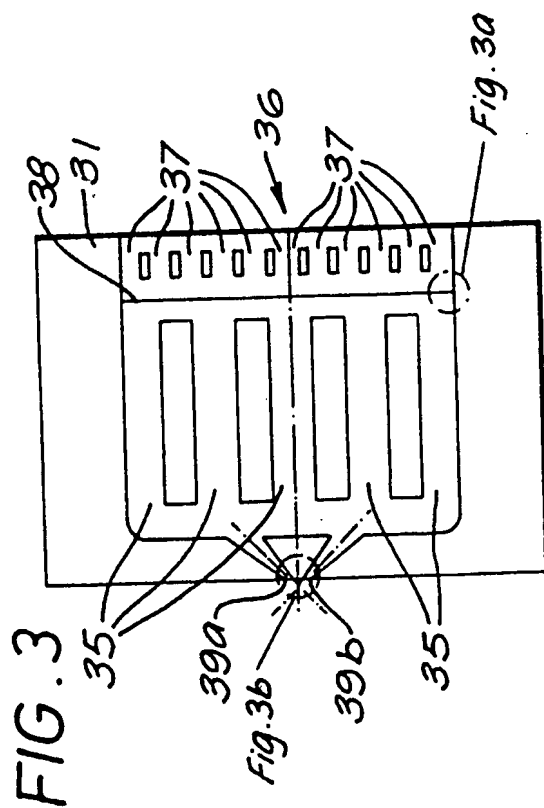

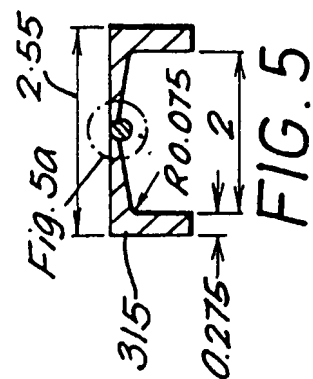


FIG. 5

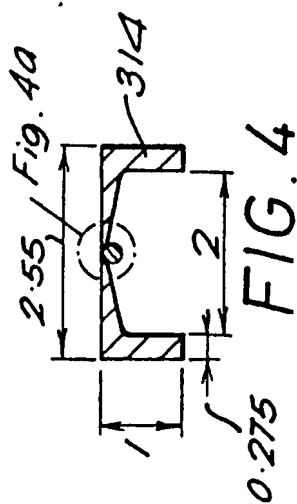


FIG. 4

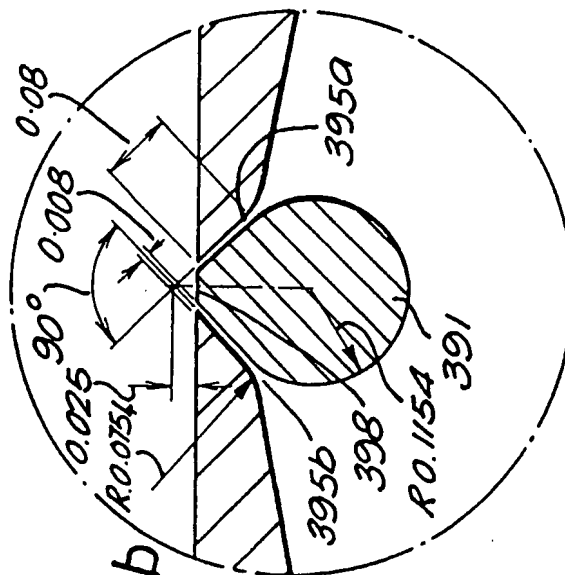


FIG. 5b

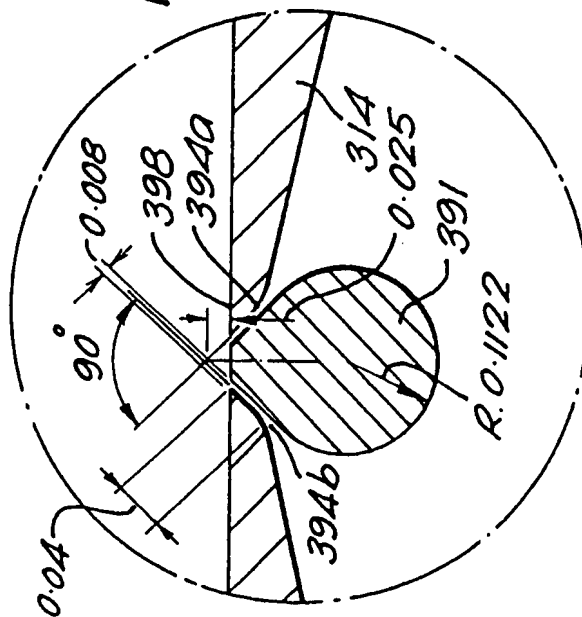


FIG. 4a

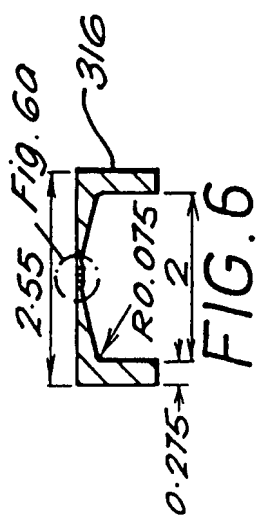
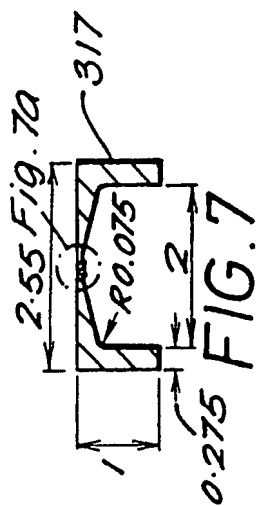


FIG. 7a

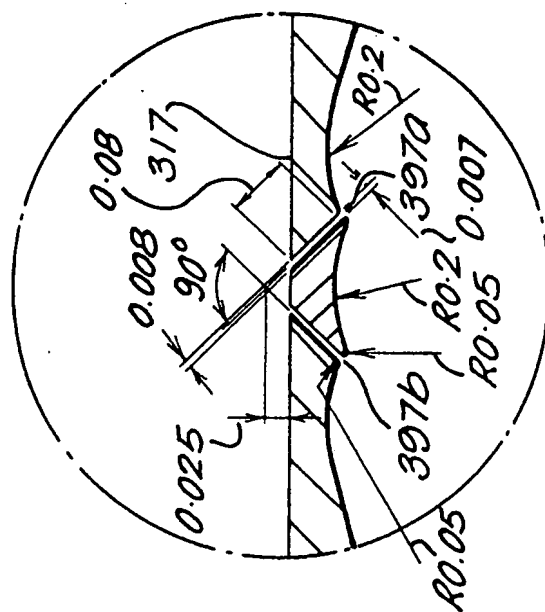
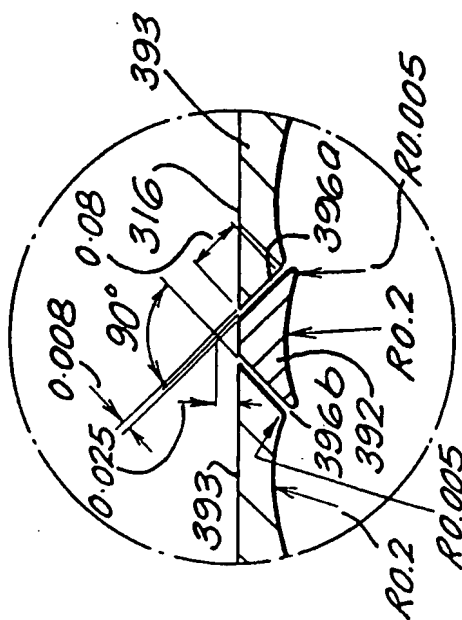


FIG. 6a




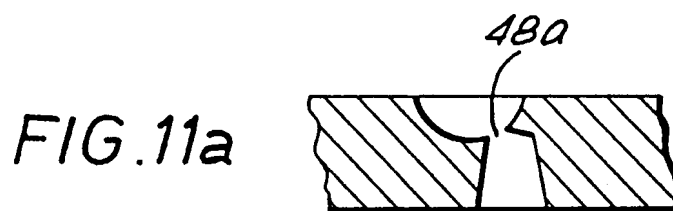
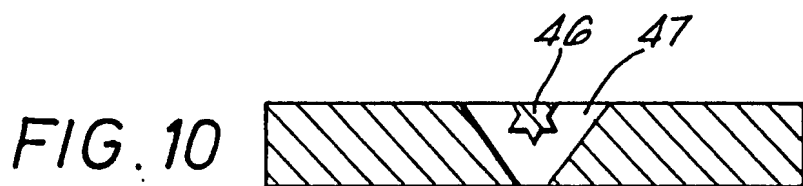
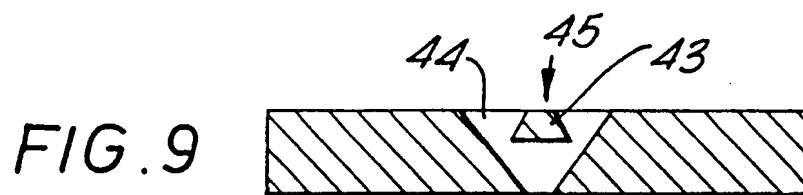
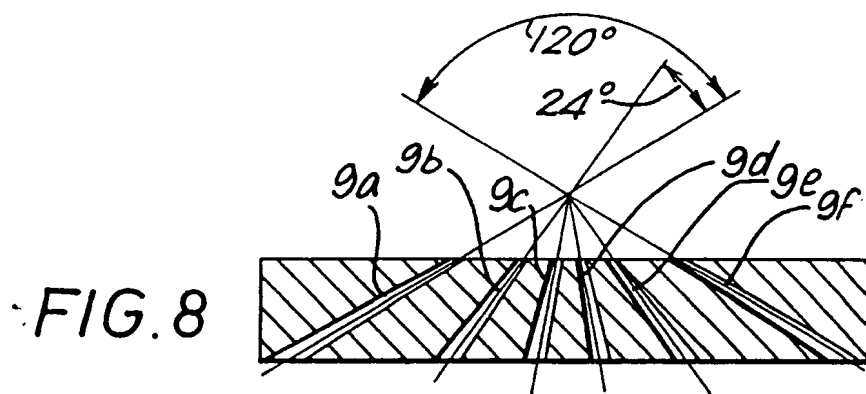


FIG. 12









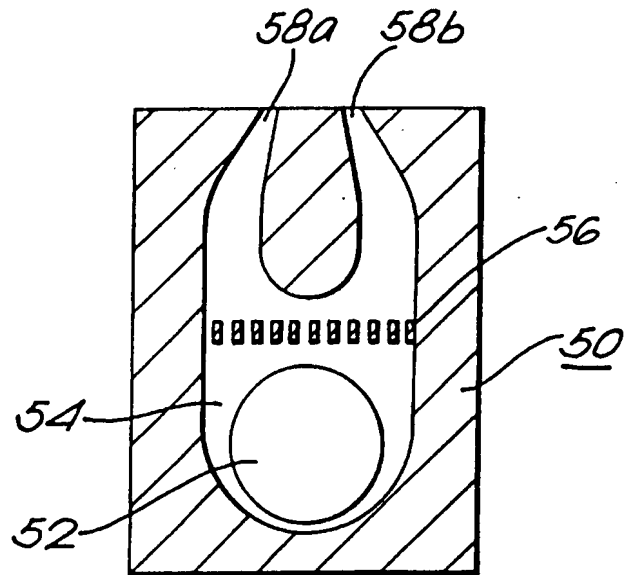


FIG. 13

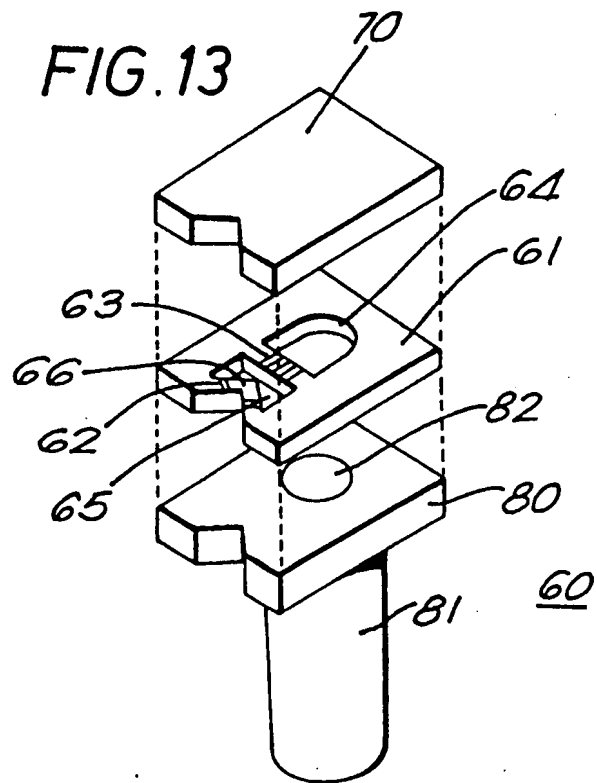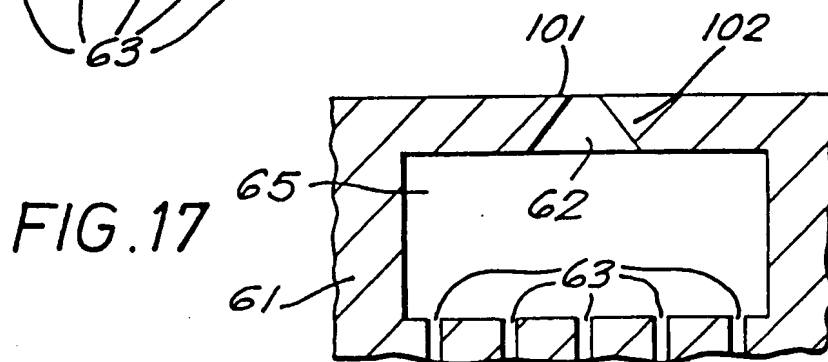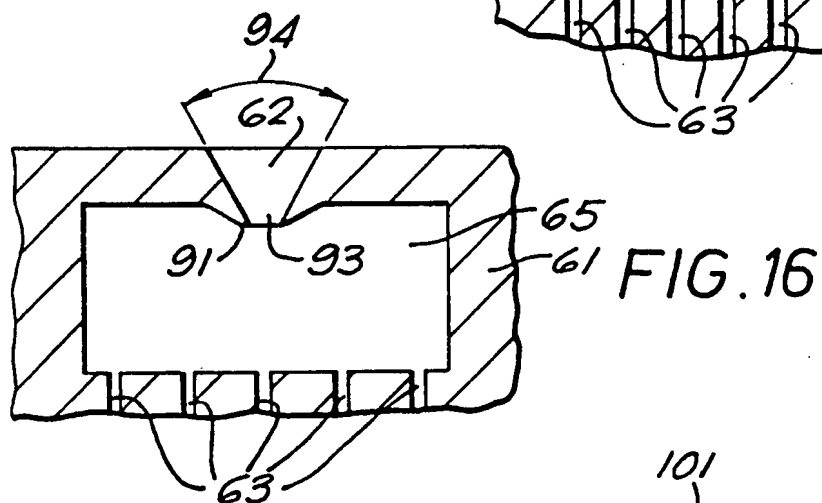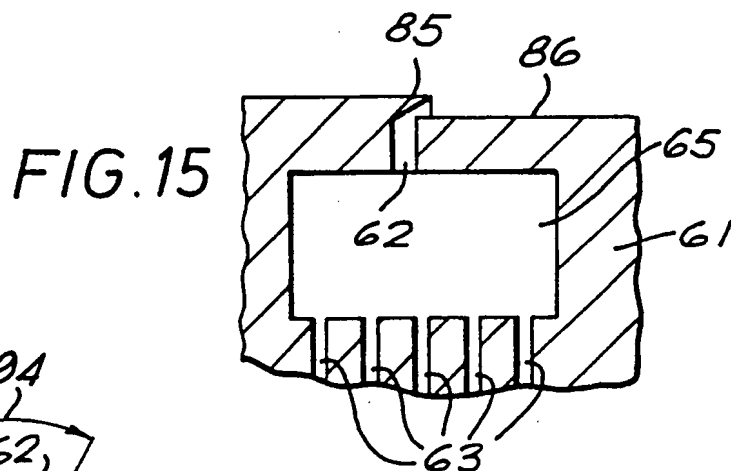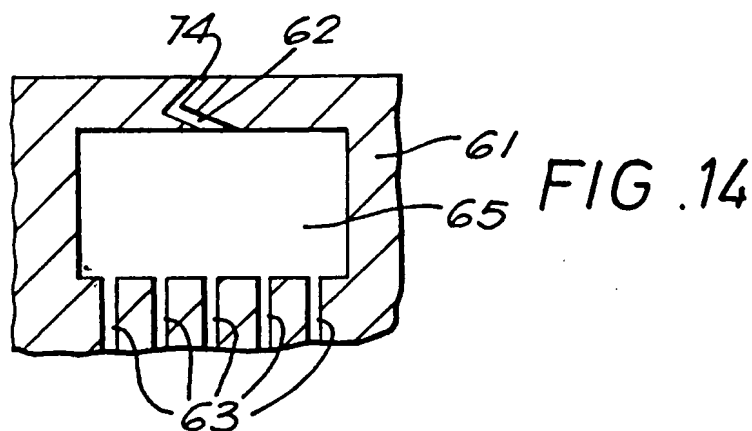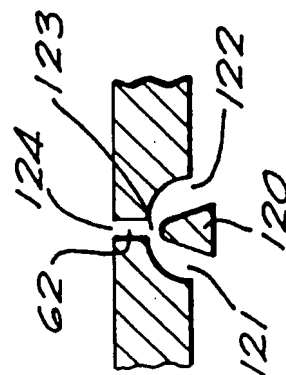

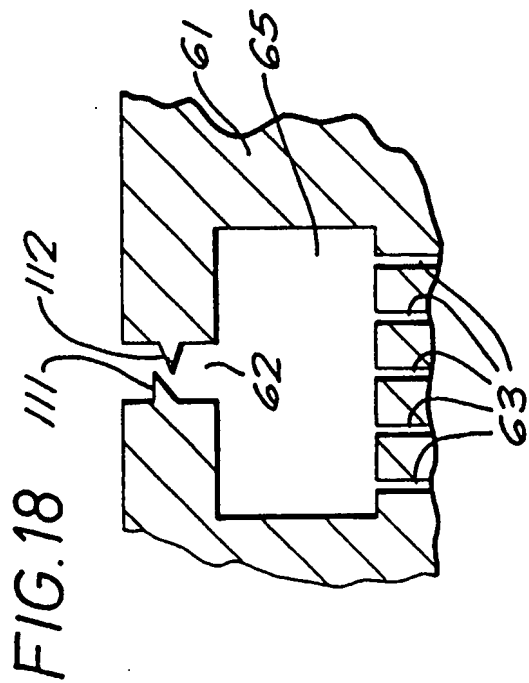

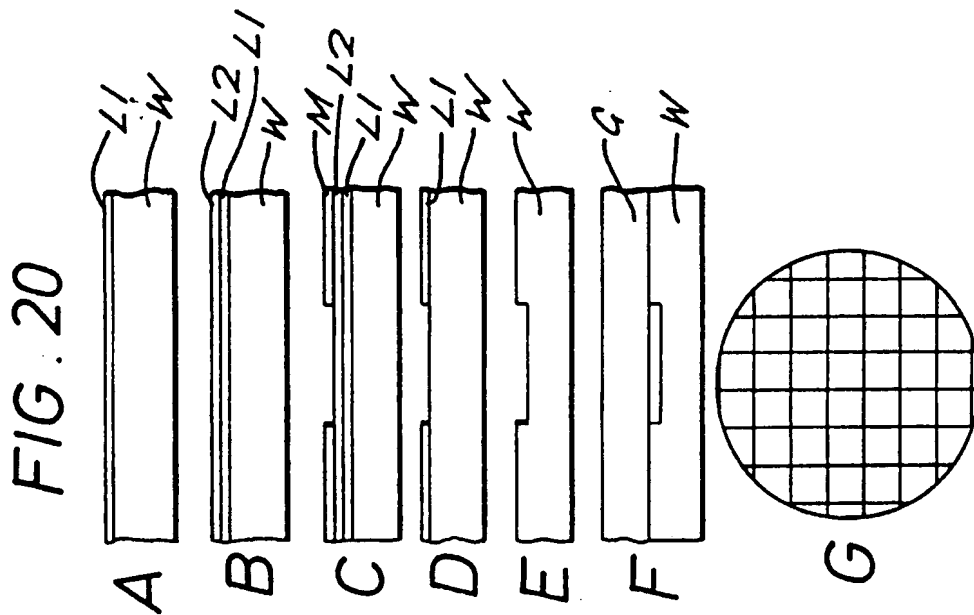

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 93/02020

A. CLASSIFICATION OF SUBJECT MATTER

IPC 5 B05B1/00 B05B1/26 B05B1/14 B05B7/04 B05B1/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 5 B05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 005, no. 183 (C-080)21 November 1981 & JP,A,56 108 877 (OKI ELECTRIC IND. CO.LTD) 28 August 1981 see abstract ---	1,3-5, 13,26-31
X	PATENT ABSTRACTS OF JAPAN vol. 005, no. 194 (C-082)10 December 1981 & JP,A,56 113 367 (HITACHI LTD) 7 September 1981 see abstract ---	1,3-5, 10,13, 16,25-31
X	PATENT ABSTRACTS OF JAPAN vol. 007, no. 029 (M-191)5 February 1983 & JP,A,57 182 452 (SHINSHIYUU SEIKI KK) 10 November 1982 see abstract ---	1-5, 13-17, 19,20, 25-29
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

16 December 1993

Date of mailing of the international search report

14. 01. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Juguet, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 93/02020

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE,C,916 879 (SCHLICK) 8 August 1954 see the whole document -----	1,3,4, 13,16, 20,23,25

INTERNATIONAL SEARCH REPORT

Information on patent family members

In ional Application No

PCT/GB 93/02020

Patent document cited in search report	Publication date	Patent family member(s) *	Publication date
DE-C-916879		NONE	